

Continental


SCIENTIFIC



Specification Sheet Catalog

TABLE OF CONTENTS

Solid Door Refrigerators	3
Extra Wide Solid Door Refrigerators	5
Solid Door Pass-Thru Refrigerators	7
Glass Door Refrigerators	9
Sliding Glass Door Refrigerators.....	11
Glass Door Pass-Thru Refrigerators	13
Combination Glass/Solid Door Pass-Thru Refrigerators	15
Solid Door Freezers.....	17
Extra Wide Solid Door Freezers.....	19
Half Door Coldwall Freezers	21
Glass Door Freezers	23
Combination Glass/Solid Door Pass-Thru Freezers.....	25
Solid Door Dual Temp Refrigerators/Freezers.....	27
Warranty.....	31

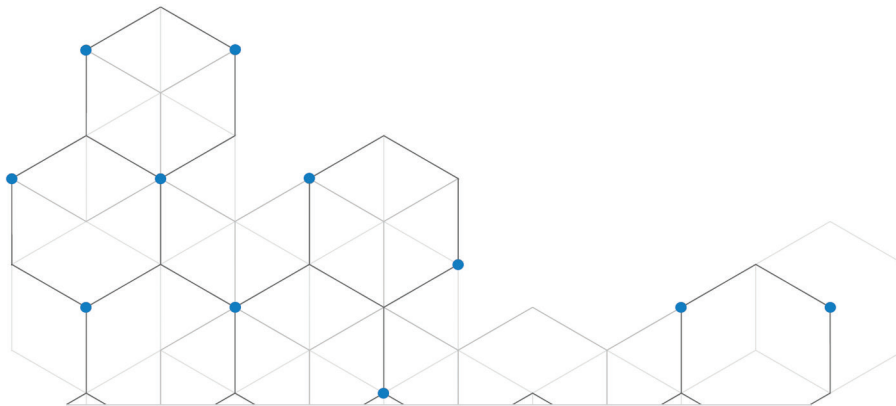

SOLID DOOR LABORATORY/PHARMACY REFRIGERATORS

Project Name:

Model Specified:

Location:

Item No:

Quantity:

Continental

SCIENTIFIC

539 Dunksferry Road
Bensalem, PA 19020
www.continentalscientific.com

Toll-Free: 800-523-7138
Phone: 215-244-1400
Fax: 215-244-9579

S1RN



**COMPLIES WITH CDC & VFC (VACCINES FOR CHILDREN)
RECOMMENDED GUIDELINES FOR VACCINE STORAGE**

S2RN



**COMPLIES WITH CDC & VFC (VACCINES FOR CHILDREN)
RECOMMENDED GUIDELINES FOR VACCINE STORAGE**

S3RN



Standard Model Features

REFRIGERATION SYSTEM

- Stainless steel front, aluminum end panels & interior
- Self contained, performance-rated refrigeration system
- Natural, environmentally-safe, high-efficiency R-290 refrigerant
- Expansion valve system
- Automatic, electric condensate evaporator

CABINET ARCHITECTURE

- 3" Non-CFC polyurethane foamed-in-place insulation
- Smooth, polished workflow chrome door handles
- Heavy-duty epoxy-coated steel shelves
- Cylinder lock in door
- Magnetic snap-in Santoprene™ door gaskets
- (2) 1/2" diameter access ports
- Attached 10 ft. cord & 90° hospital grade NEMA-5-15P plug
- Adjustable temperature control, range +2°C - +8°C, factory pre-set at +4°C
- 5" Casters

MODEL FEATURES

- LED interior lighting
- Electronic controller w/ centigrade temperature digital display

Options and Accessories




(upcharges and lead times may apply)

Adjustable legs	220/50/1 Voltage
Additional shelves	208-230/60/1 Voltage
Pass thru doors (-PT models)	7 Day temperature chart recorder
Rehinging of doors	Remote temperature logger
Half doors (-HD models)	Audible/visual temperature alarm w/ battery back-up & dry contact relay
Stainless steel exterior, aluminum interior (-SA models)	Export crating
Stainless steel exterior and interior (-SS models)	NIST thermometer (consult factory)

APPROVAL:

SOLID DOOR LABORATORY/PHARMACY REFRIGERATORS

Line Drawings

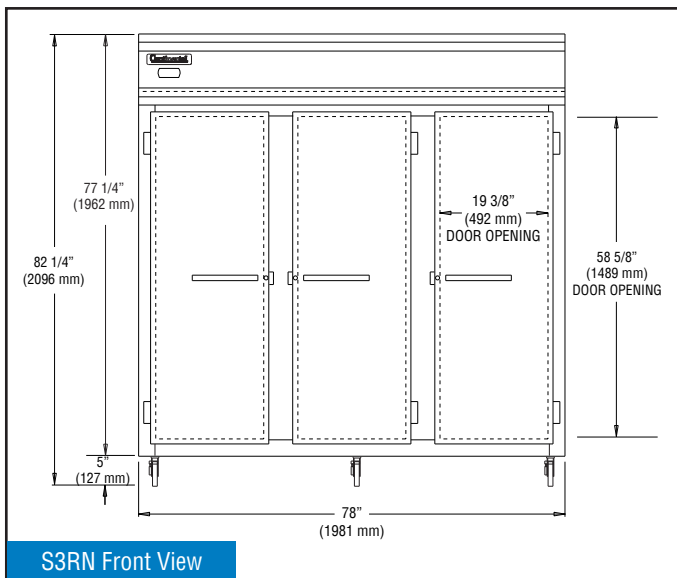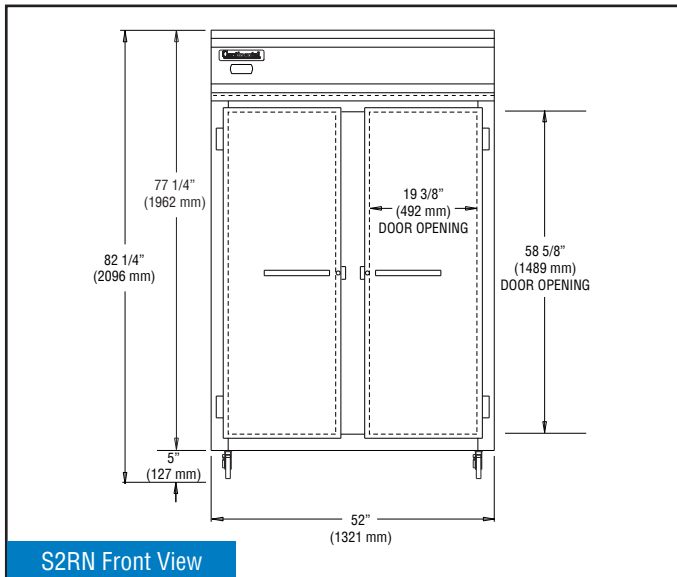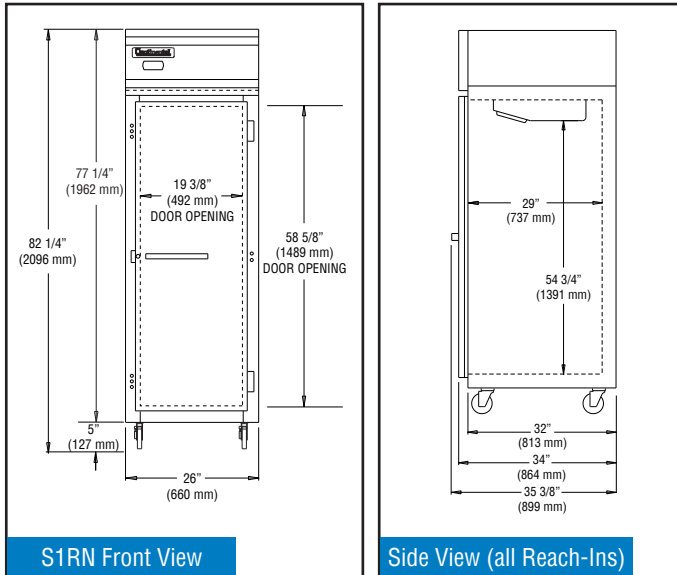

Continental

SCIENTIFIC

539 Dunksferry Road
Bensalem, PA 19020
www.continentalscientific.com

Toll-Free: 800-523-7138
Phone: 215-244-1400
Fax: 215-244-9579

Model Specifications

DIMENSIONAL DATA	S1RN	S2RN	S3RN
Net Capacity (cu. ft.)	20	48	70
Width, Overall (in.)	26	52	78
Depth, Overall (in.) (incl. handles & bumpers)	35 3/8	35 3/8	35 3/8
Height, Overall (in.)	82 1/4	82 1/4	82 1/4
No. of Doors	1	2	3
No. of Shelves	4	8	12
REFRIGERATION DATA			
Condensing Unit (H.P.)	1/4+	1/3+	1/2
ELECTRICAL DATA			
Voltage	115/60/1	115/60/1	115/60/1
Feed Wires (incl. ground)	3	3	3
Total Amps	5.2	6.9	8.5
10 ft. Cord/Plug [attached]	Yes	Yes	Yes
SHIPPING DATA			
Weight (lbs.)	284	433	619
Height - Crated (in.)	85 1/2	85 1/2	85 1/2
Width - Crated (in.)	31 5/8	64	90
Depth - Crated (in.)	42	42	42

Ship Weight for -SA and -SS models is on average 5% higher than Standard models. Consult factory for shipping weight of these models.



Equipped with (1) 90° hospital grade NEMA-5-15P plug (varies by country)

LOCATION OF 1/2" DIAMETER PROBE ACCESS PORTS:

- (1) Ceiling, front top left corner
- (1) Rear wall, top center

Consult factory for exact locations

Due to our continued efforts in developing innovative products, specifications subject to change without notice.

© Copyright 2021. Continental Refrigerator.
A Division of National Refrigeration & Air Conditioning Products, Inc.



EXTRA WIDE SOLID DOOR LABORATORY/PHARMACY REFRIGERATORS

Project Name:

Model Specified:

Location:

Item No:

Quantity:

Continental

SCIENTIFIC

539 Dunksferry Road
Bensalem, PA 19020
www.continentalscientific.com

Toll-Free: 800-523-7138
Phone: 215-244-1400
Fax: 215-244-9579

S1RXN



Standard Model Features

REFRIGERATION SYSTEM

- Stainless steel front, aluminum end panels & interior
- Self contained, performance-rated refrigeration system
- Natural, environmentally-safe, high-efficiency R-290 refrigerant
- Expansion valve system
- Automatic, electric condensate evaporator

CABINET ARCHITECTURE

- 3" Non-CFC polyurethane foamed-in-place insulation
- Smooth, polished workflow chrome door handles
- Heavy-duty epoxy-coated steel shelves
- Cylinder lock in door
- Magnetic snap-in Santoprene™ door gaskets
- (2) 1/2" diameter access ports
- Attached 10 ft. cord & 90° hospital grade NEMA-5-15P plug
- Adjustable temperature control, range +2°C - +8°C, factory pre-set at +4°C
- 5" Casters

MODEL FEATURES

- LED interior lighting
- Electronic controller w/ centigrade temperature digital display

Options and Accessories


(upcharges and lead times may apply)

Adjustable legs	220/50/1 Voltage
Additional shelves	208-230/60/1 Voltage
Pass thru doors (-PT models)	7 Day temperature chart recorder
Rehinging of doors	Remote temperature logger
Half doors (-HD models)	Audible/visual temperature alarm w/ battery back-up & dry contact relay
Stainless steel exterior, aluminum interior (-SA models)	Export crating
Stainless steel exterior and interior (-SS models)	NIST thermometer (consult factory)


APPROVAL:

EXTRA WIDE SOLID DOOR LABORATORY/PHARMACY REFRIGERATORS

Line Drawings

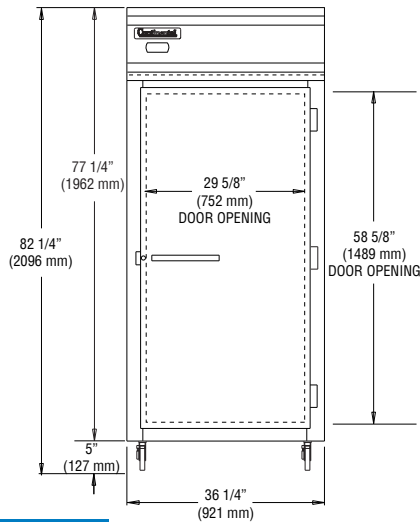

S1RXN Front View

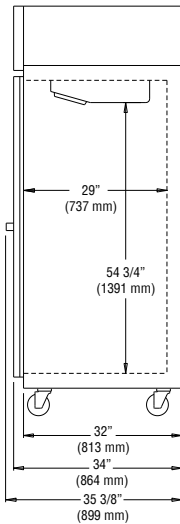

S1RXN Side View

Continental

SCIENTIFIC

539 Dunksferry Road
Bensalem, PA 19020
www.continentalscientific.com

Toll-Free: 800-523-7138
Phone: 215-244-1400
Fax: 215-244-9579

Model Specifications

DIMENSIONAL DATA	S1RXN
Net Capacity (cu. ft.)	30
Width, Overall (in.)	36 1/4
Depth, Overall (in.) (incl. handles & bumpers)	35 3/8
Height, Overall (in.)	82 1/4
No. of Doors	1
No. of Shelves	4
REFRIGERATION DATA	
Condensing Unit (H.P.)	1/3+
ELECTRICAL DATA	
Voltage	115-60-1
Feed Wires (incl. ground)	3
Total Amps	6.6
10 ft. Cord/Plug [attached]	Yes
SHIPPING DATA	
Weight (lbs.)	430
Height - Crated (in.)	85 1/2
Width - Crated (in.)	42
Depth - Crated (in.)	42

Ship Weight for -SA and -SS models is on average 5% higher than Standard models. Consult factory for shipping weight of these models.



Equipped with (1) 90° hospital grade NEMA-5-15P plug (varies by country)

LOCATION OF 1/2" DIAMETER PROBE ACCESS PORTS:

- (1) Ceiling, front top left corner
- (1) Rear wall, top center

Consult factory for exact locations

Due to our continued efforts in developing innovative products, specifications subject to change without notice.

© Copyright 2021. Continental Refrigerator.
A Division of National Refrigeration & Air Conditioning Products, Inc.



SOLID DOOR PASS-THRU LABORATORY/PHARMACY REFRIGERATORS

Project Name:

Model Specified:

Location:

Item No:

Quantity:

Continental

SCIENTIFIC

539 Dunksferry Road
Bensalem, PA 19020
www.continentalscientific.com

Toll-Free: 800-523-7138
Phone: 215-244-1400
Fax: 215-244-9579

S1RNPT



S1RXNPT



S2RNPT



S3RNPT



Standard Model Features

REFRIGERATION SYSTEM

- Stainless steel front, aluminum end panels & interior
- Self contained, performance-rated refrigeration system
- Natural, environmentally-safe, high-efficiency R-290 refrigerant
- Expansion valve system
- Automatic, hot gas condensate evaporator

CABINET ARCHITECTURE

- 3" Non-CFC polyurethane foamed-in-place insulation
- Smooth, polished workflow chrome door handles
- Heavy-duty epoxy-coated steel shelves
- Cylinder lock in door
- Magnetic snap-in Santoprene™ door gaskets
- (1) 1/2" diameter probe access ports
- Attached 10 ft. cord & 90° hospital grade NEMA-5-15P plug
- Adjustable temperature control, range +2°C - +8°C, factory pre-set at +4°C
- 5" Casters

MODEL FEATURES

- LED interior lighting
- Electronic controller w/ centigrade temperature digital display

Options and Accessories




(upcharges and lead times may apply)

Adjustable legs	220/50/1 Voltage
Additional shelves	208-230/60/1 Voltage
Rehinging of doors	7 Day temperature chart recorder
Half doors (-HD models)	Remote temperature logger
Stainless steel exterior, aluminum interior (-SA models)	Audible/visual temperature alarm w/ battery back-up & dry contact relay
Stainless steel exterior and interior (-SS models)	Export crating
NIST thermometer (consult factory)	

APPROVAL:

SOLID DOOR PASS-THRU LABORATORY/PHARMACY REFRIGERATORS

Line Drawings

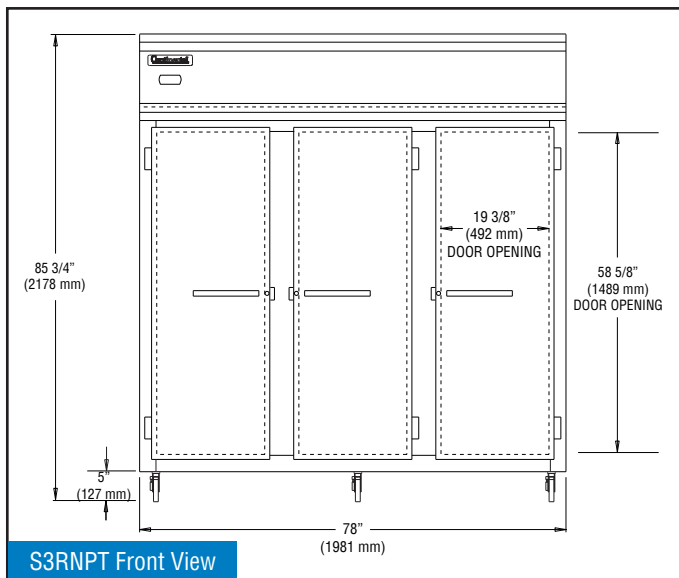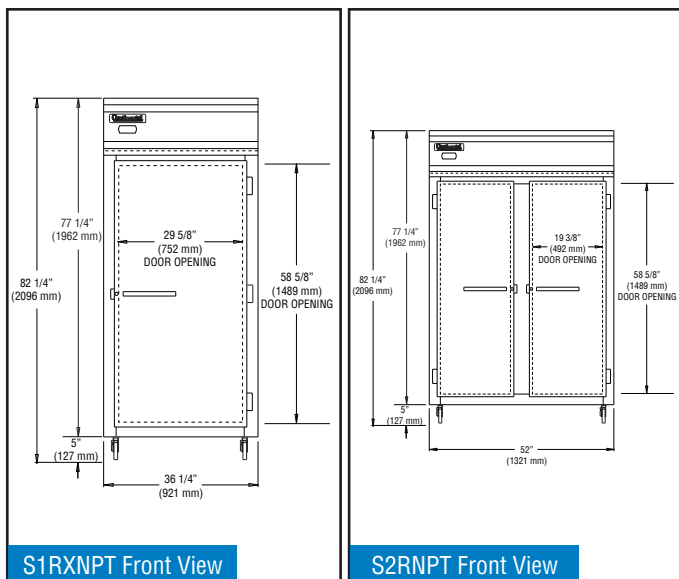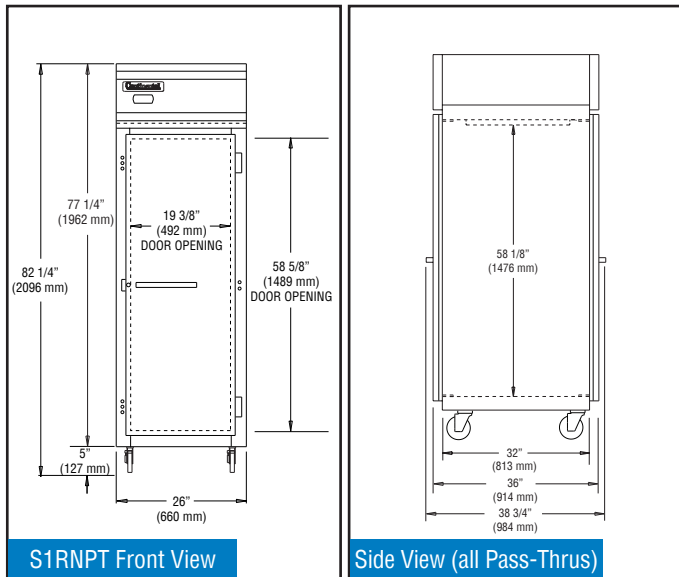

Continental

SCIENTIFIC

539 Dunksferry Road
Bensalem, PA 19020
www.continentalscientific.com

Toll-Free: 800-523-7138
Phone: 215-244-1400
Fax: 215-244-9579

Model Specifications

DIMENSIONAL DATA	S1RNPT	S1RXNPT	S2RNPT	S3RNPT
Net Capacity (cu. ft.)	20	30	48	72
Width, Overall (in.)	26	36 1/4	52	78
Depth, Overall (in.) (incl. handles & bumpers)	38 3/4	38 3/4	38 3/4	38 3/4
Height, Overall (in.)	82 1/4	82 1/4	82 1/4	82 1/4
No. of Doors	2	2	4	6
No. of Shelves	3	3	6	9
REFRIGERATION DATA				
Condensing Unit (H.P.)	1/4+	1/3+	1/3+	1/2
ELECTRICAL DATA				
Voltage	115/60/1	115/60/1	115/60/1	115/60/1
Feed Wires (incl. ground)	3	3	3	3
Total Amps	5.2	6.6	6.9	14.1
10 ft. Cord/Plug [attached]	Yes	Yes	Yes	Yes
SHIPPING DATA				
Weight (lbs.)	340	430	580	805
Height - Crated (in.)	85 1/2	85 1/2	85 1/2	85 1/2
Width - Crated (in.)	31 5/8	42	64	90
Depth - Crated (in.)	42	42	42	42

Ship Weight for -SA and -SS models is on average 5% higher than Standard models. Consult factory for shipping weight of these models.



Equipped with (1) 90° hospital grade NEMA-5-15P plug (varies by country)

LOCATION OF 1/2" DIAMETER PROBE ACCESS PORT:

(1) Ceiling, front top left corner
Consult factory for exact locations

Due to our continued efforts in developing innovative products, specifications subject to change without notice.

© Copyright 2021. Continental Refrigerator.
A Division of National Refrigeration & Air Conditioning Products, Inc.



GLASS DOOR LABORATORY/PHARMACY REFRIGERATORS

Project Name:

Model Specified:

Location:

Item No:

Quantity:

Continental

SCIENTIFIC

539 Dunksferry Road
Bensalem, PA 19020
www.continentalscientific.com

Toll-Free: 800-523-7138
Phone: 215-244-1400
Fax: 215-244-9579

S1RNGD



COMPLIES WITH CDC & VFC (VACCINES FOR CHILDREN) RECOMMENDED GUIDELINES FOR VACCINE STORAGE

S1RXNGD



Standard Model Features

REFRIGERATION SYSTEM

- Stainless steel front, aluminum end panels & interior
- Self contained, performance-rated refrigeration system
- Natural, environmentally-safe, high-efficiency R-290 refrigerant
- Expansion valve system
- Automatic, electric condensate evaporator

CABINET ARCHITECTURE

- 3" Non-CFC polyurethane foamed-in-place insulation
- Chrome-plated handles
- Heavy-duty epoxy-coated steel shelves
- Cylinder lock in door
- Magnetic snap-in door gaskets
- (2) 1/2" diameter probe access ports
- Attached 10 ft. cord & 90° hospital grade NEMA-5-15P plug
- Adjustable temperature control, range +2°C - +8°C, factory pre-set at +4°C
- 5" Casters

MODEL FEATURES

- LED interior lighting
- Electronic controller w/ centigrade temperature digital display

S2RNGD



Options and Accessories

(upcharges and lead times may apply)

Adjustable legs	220/50/1 Voltage
Additional shelves	208-230/60/1 Voltage
Pass thru doors (-PT models)	7 Day temperature chart recorder
Rehinging of doors	Remote temperature logger
Half doors (-HD models)	Audible/visual temperature alarm w/ battery back-up & dry contact relay
Stainless steel exterior, aluminum interior (-SA models)	Export crating
Stainless steel exterior and interior (-SS models)	NIST thermometer (consult factory)






S3RNGD



APPROVAL:

GLASS DOOR LABORATORY/PHARMACY REFRIGERATORS

Line Drawings

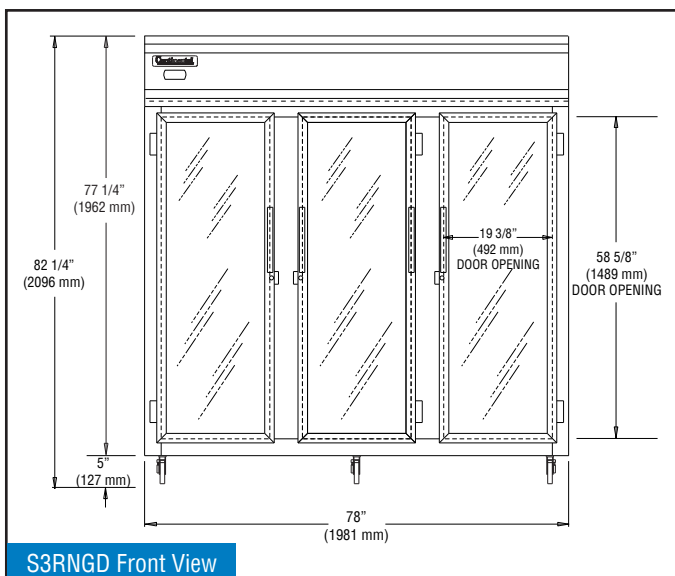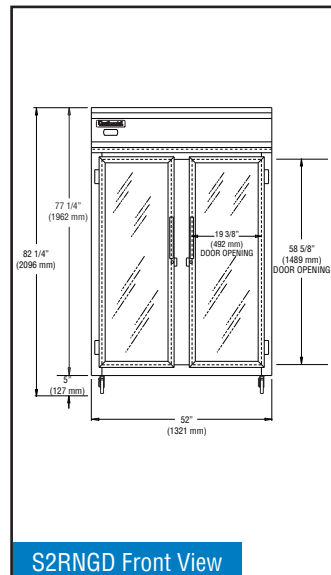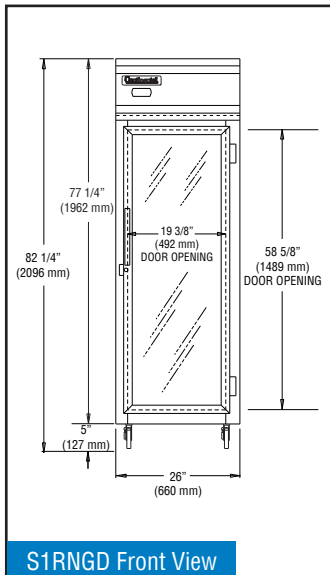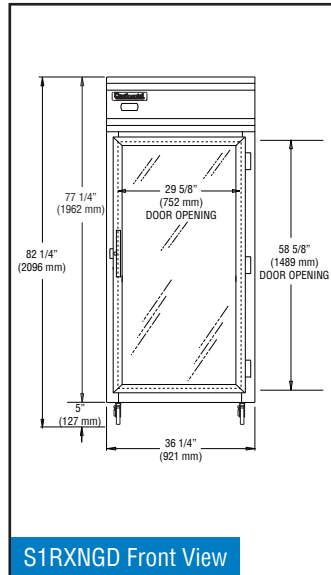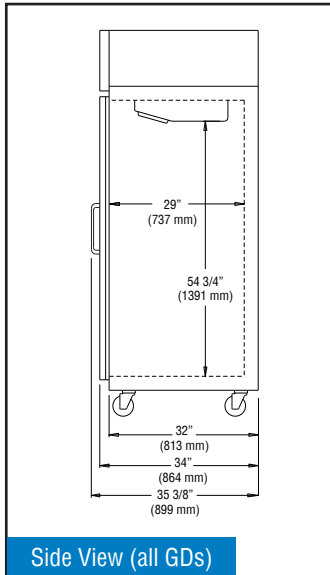

Continental

SCIENTIFIC

539 Dunksferry Road
Bensalem, PA 19020
www.continentalscientific.com

Toll-Free: 800-523-7138
Phone: 215-244-1400
Fax: 215-244-9579

Model Specifications

DIMENSIONAL DATA	S1RNGD	S1RXNGD	S2RNGD	S3RNGD
Net Capacity (cu. ft.)	20	30	48	70
Width, Overall (in.)	26	36 1/4	52	78
Depth, Overall (in.) (incl. handles & bumpers)	35 3/8	35 3/8	35 3/8	35 3/8
Height, Overall (in.)	82 1/4	82 1/4	82 1/4	82 1/4
No. of Doors	1	1	2	3
No. of Shelves	4	4	8	12
REFRIGERATION DATA				
Condensing Unit (H.P.)	1/4+	1/3+	1/3+	1/2
ELECTRICAL DATA				
Voltage	115/60/1	115/60/1	115/60/1	115/60/1
Feed Wires (incl. ground)	3	3	3	4
Total Amps	8.1	8.4	14.3	12.4
10 ft. Cord/Plug [attached]	Yes	Yes	Yes	Yes
SHIPPING DATA				
Weight (lbs.)	315	440	530	740
Height - Crated (in.)	85 1/2	85 1/2	85 1/2	85 1/2
Width - Crated (in.)	31 5/8	42	64	90
Depth - Crated (in.)	42	42	42	42

Ship Weight for -SA and -SS models is on average 5% higher than Standard models. Consult factory for shipping weight of these models.



Equipped with (1) 90° hospital grade NEMA-5-15P plug (varies by country)

LOCATION OF 1/2" DIAMETER PROBE ACCESS PORTS:

- (1) Ceiling, front top left corner
 - (1) Rear wall, top center
- Consult factory for exact locations

Due to our continued efforts in developing innovative products, specifications subject to change without notice.

© Copyright 2021. Continental Refrigerator.
A Division of National Refrigeration & Air Conditioning Products, Inc.



SLIDING GLASS DOOR LABORATORY/PHARMACY REFRIGERATORS

Project Name:

Model Specified:

Location:

Item No:

Quantity:

Continental

SCIENTIFIC

539 Dunksferry Road
Bensalem, PA 19020
www.continentalscientific.com

Toll-Free: 800-523-7138
Phone: 215-244-1400
Fax: 215-244-9579

S2RNSGD



Standard Model Features

REFRIGERATION SYSTEM

- Stainless steel front, aluminum end panels & interior
- Self contained, performance-rated refrigeration system
- Natural, environmentally-safe, high-efficiency R-290 refrigerant
- Expansion valve system
- Automatic, electric condensate evaporator

CABINET ARCHITECTURE

- 3" Non-CFC polyurethane foamed-in-place insulation
- Heavy-duty epoxy-coated steel shelves
- Locking doors
- Magnetic snap-in door gaskets
- (2) 1/2" diameter probe access ports
- Attached 10 ft. cord & 90° hospital grade NEMA-5-15P plug
- Adjustable temperature control, range +2°C - +8°C, factory pre-set at +4°C
- 5" Casters

MODEL FEATURES

- LED interior lighting
- Electronic controller w/ centigrade temperature digital display

Options and Accessories


(upcharges and lead times may apply)

Adjustable legs	220/50/1 Voltage
Additional shelves	208-230/60/1 Voltage
Pass thru doors (-PT models)	7 Day temperature chart recorder
Rehinging of doors	Remote temperature logger
Half doors (-HD models)	Audible/visual temperature alarm w/ battery back-up & dry contact relay
Stainless steel exterior, aluminum interior (-SA models)	Export crating
Stainless steel exterior and interior (-SS models)	NIST thermometer (consult factory)


APPROVAL:

SLIDING GLASS DOOR LABORATORY/PHARMACY REFRIGERATORS

Line Drawings

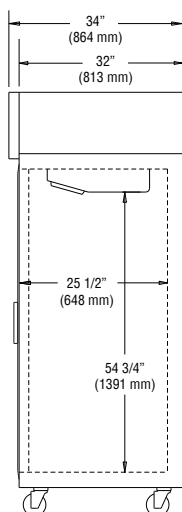

S2RNSGD Side View

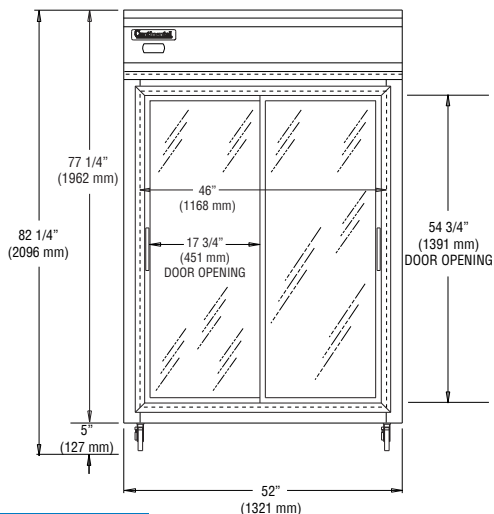

S2RNSGD Front View

Continental

SCIENTIFIC

539 Dunksferry Road
Bensalem, PA 19020
www.continentalscientific.com

Toll-Free: 800-523-7138
Phone: 215-244-1400
Fax: 215-244-9579

Model Specifications

DIMENSIONAL DATA

	S2RNSGD
Net Capacity (cu. ft.)	48
Width, Overall (in.)	52
Depth, Overall (in.) (incl. handles & bumpers)	34
Height, Overall (in.)	82 1/4
No. of Doors	2
No. of Shelves	8

REFRIGERATION DATA

Condensing Unit (H.P.)	1/3
------------------------	-----

ELECTRICAL DATA

Voltage	115/60/1
Feed Wires (incl. ground)	3
Total Amps	14.3
10 ft. Cord/Plug [attached]	Yes

SHIPPING DATA

Weight (lbs.)	530
Height - Crated (in.)	85 1/2
Width - Crated (in.)	55
Depth - Crated (in.)	42

Ship Weight for -SA and -SS models is on average 5% higher than Standard models. Consult factory for shipping weight of these models.



Equipped with (1) 90° hospital grade NEMA-5-15P plug (varies by country)

LOCATION OF 1/2" DIAMETER PROBE ACCESS PORTS:

- (1) Ceiling, front top left corner
- (1) Rear wall, top center

Consult factory for exact locations

Due to our continued efforts in developing innovative products, specifications subject to change without notice.

© Copyright 2021. Continental Refrigerator.
A Division of National Refrigeration & Air Conditioning Products, Inc.



GLASS DOOR PASS-THRU LABORATORY/PHARMACY REFRIGERATORS

Project Name:

Model Specified:

Location:

Item No:

Quantity:

Continental

SCIENTIFIC

539 Dunksferry Road
Bensalem, PA 19020
www.continentalscientific.com

Toll-Free: 800-523-7138
Phone: 215-244-1400
Fax: 215-244-9579

S1RXNGDPTZ



Standard Model Features

REFRIGERATION SYSTEM

- Stainless steel front, aluminum end panels & interior
- Self contained, performance-rated refrigeration system
- Natural, environmentally-safe, high-efficiency R-290 refrigerant
- Expansion valve system
- Hot gas condensate evaporator

CABINET ARCHITECTURE

- 3" Non-CFC polyurethane foamed-in-place insulation
- Smooth, polished workflow chrome door handles
- Heavy-duty epoxy-coated steel shelves
- Locking doors

Magnetic snap-in door gaskets

(1) 1/2" diameter access ports

Attached 10 ft. cord & 90° hospital grade NEMA-5-15P plug

Adjustable temperature control, range +2°C - +8°C,
factory pre-set at +4°C

5" Casters

MODEL FEATURES

LED interior lighting

Electronic controller w/ centigrade temperature digital display

S2RXNGDPTZ



Options and Accessories


(upcharges and lead times may apply)

Adjustable legs	220/50/1 Voltage
Additional shelves	208-230/60/1 Voltage
Rehinging of doors	7 Day temperature chart recorder
Half doors (-HD models)	Remote temperature logger
Stainless steel exterior, aluminum interior (-SA models)	Audible/visual temperature alarm w/ battery back-up & dry contact relay
Stainless steel exterior and interior (-SS models)	Export crating
NIST thermometer (consult factory)	


APPROVAL:

GLASS DOOR PASS-THRU LABORATORY/PHARMACY REFRIGERATORS


Line Drawings

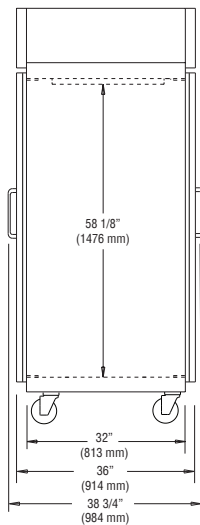

Side View (all)

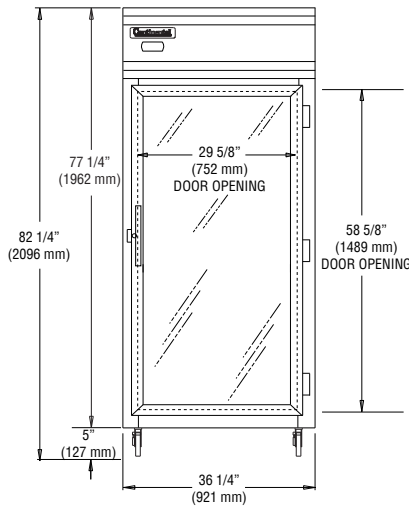

S1RXNGDPTZ Front View

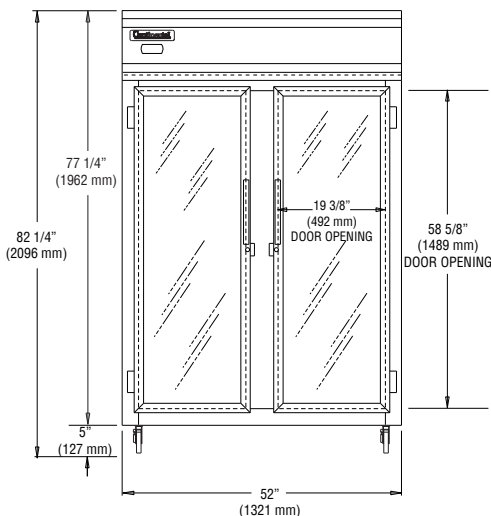

S2RNGDPTZ Front View

Continental

SCIENTIFIC

539 Dunksferry Road
Bensalem, PA 19020

www.continentalscientific.com

Toll-Free: 800-523-7138
Phone: 215-244-1400
Fax: 215-244-9579

Model Specifications

DIMENSIONAL DATA

	S1RXNGDPTZ	S2RNGDPTZ
Net Capacity (cu. ft.)	30	50
Width, Overall (in.)	36 1/4	52
Depth, Overall (in.) (incl. handles & bumpers)	38 3/4	38 3/4
Height, Overall (in.)	82 1/4	82 1/4
No. of Doors	2	4
No. of Shelves	4	8

REFRIGERATION DATA

Condensing Unit (H.P.)	1/3+	1/3+
------------------------	------	------

ELECTRICAL DATA

Voltage	115/60/1	115/60/1
Feed Wires (incl. ground)	3	3
Total Amps	6.6	6.9
10 ft. Cord/Plug [attached]	Yes	Yes

SHIPPING DATA

Weight (lbs.)	435	580
Height - Crated (in.)	85 1/2	85 1/2
Width - Crated (in.)	42	64
Depth - Crated (in.)	42	42

Ship Weight for -SA and -SS models is on average 5% higher than Standard models. Consult factory for shipping weight of these models.



Equipped with (1) 90° hospital grade NEMA-5-15P plug (varies by country)

LOCATION OF 1/2" DIAMETER PROBE ACCESS PORT:

(1) Ceiling, front top left corner

Consult factory for exact locations

Due to our continued efforts in developing innovative products, specifications subject to change without notice.

© Copyright 2021. Continental Refrigerator.
A Division of National Refrigeration & Air Conditioning Products, Inc.



COMBO DOOR PASS-THRU LABORATORY/PHARMACY REFRIGERATORS

Project Name:

Model Specified:

Location:

Item No:

Quantity:

Continental

SCIENTIFIC

539 Dunksferry Road
Bensalem, PA 19020
www.continentalscientific.com

Toll-Free: 800-523-7138
Phone: 215-244-1400
Fax: 215-244-9579

S1RNGDPT



S1RXNGDPT



S2RNGDPT



S2RNSGDPT



Standard Model Features

REFRIGERATION SYSTEM

- Stainless steel front, aluminum end panels & interior
- Self contained, performance-rated refrigeration system
- Natural, environmentally-safe, high-efficiency R-290 refrigerant
- Expansion valve system
- Automatic, hot gas condensate evaporator

CABINET ARCHITECTURE

- 3" Non-CFC polyurethane foamed-in-place insulation
- Heavy-duty epoxy-coated steel shelves
- Locking doors
- Magnetic snap-in door gaskets
- (1) 1/2" diameter access ports
- Attached 10 ft. cord & 90° hospital grade NEMA-5-15P plug
- Adjustable temperature control, range +2°C - +8°C, factory pre-set at +4°C
- 5" Casters

MODEL FEATURES

- LED interior lighting
- Electronic controller w/ centigrade temperature digital display
- Glass door on one side, solid door on the other side

Options and Accessories


(upcharges and lead times may apply)

Adjustable legs	220/50/1 Voltage
Additional shelves	208-230/60/1 Voltage
Rehinging of doors	7 Day temperature chart recorder
Half doors (-HD models)	Remote temperature logger
Stainless steel exterior, aluminum interior (-SA models)	Audible/visual temperature alarm w/ battery back-up & dry contact relay
Stainless steel exterior and interior (-SS models)	Export crating
NIST thermometer (consult factory)	


APPROVAL:

COMBO DOOR PASS-THRU LABORATORY/PHARMACY REFRIGERATORS


Line Drawings

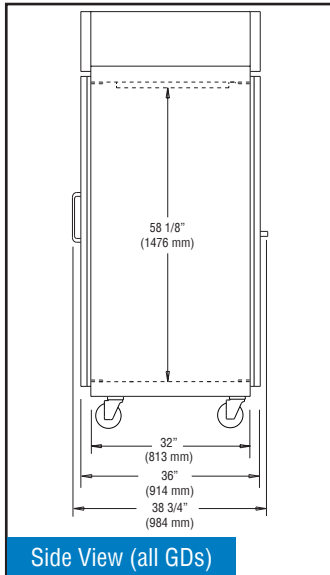


Side View (all GDs)

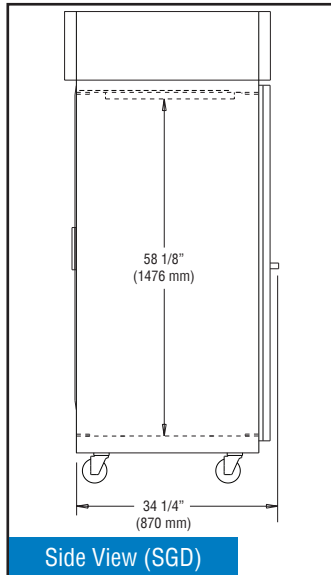


Side View (SGD)

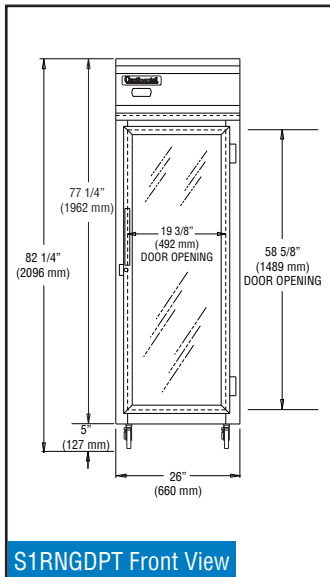


S1RNGDPT Front View

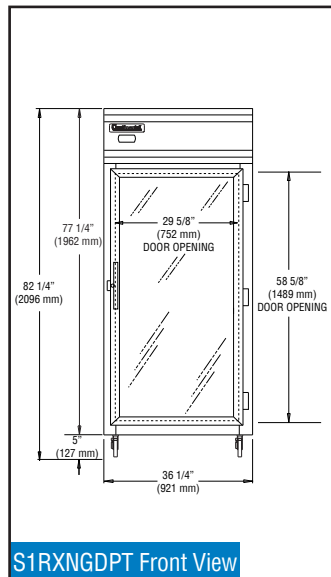

S1RXNGDPT Front View

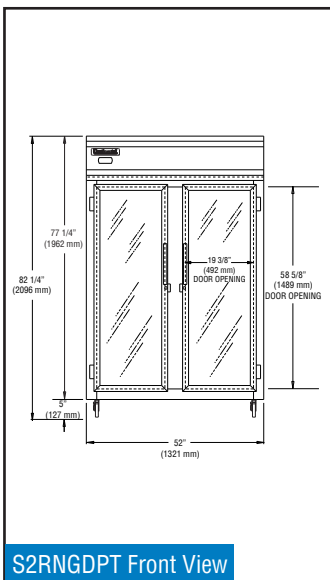

S2RNGDPT Front View

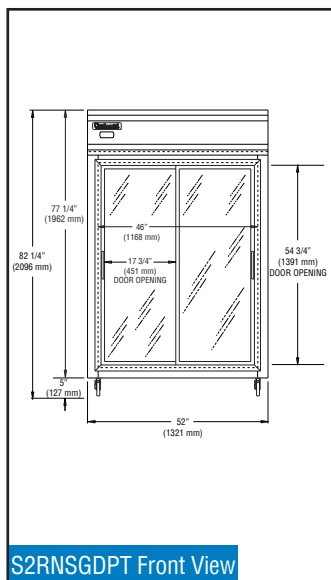

S2RNSGDPT Front View

Continental

SCIENTIFIC

539 Dunksferry Road
Bensalem, PA 19020
www.continentalscientific.com

Toll-Free: 800-523-7138
Phone: 215-244-1400
Fax: 215-244-9579

Model Specifications

DIMENSIONAL DATA	S1RNGDPT	S1RXNGDPT	S2RNGDPT	S2RNSGDPT
Net Capacity (cu. ft.)	20	30	50	50
Width, Overall (in.)	26	36 1/4	52	52
Depth, Overall (in.) (incl. handles & bumpers)	38 3/4	38 3/4	38 3/4	34 1/4
Height, Overall (in.)	82 1/4	82 1/4	82 1/4	82 1/4
No. of Doors	2	2	4	4
No. of Shelves	4	4	8	8
REFRIGERATION DATA				
Condensing Unit (H.P.)	1/4+	1/3+	1/3+	1/3+
ELECTRICAL DATA				
Voltage	115/60/1	115/60/1	115/60/1	115/60/1
Feed Wires (incl. ground)	3	3	3	3
Total Amps	5.2	6.6	6.9	7.9
10 ft. Cord/Plug [attached]	Yes	Yes	Yes	Yes
SHIPPING DATA				
Weight (lbs.)	340	435	580	550
Height - Crated (in.)	85 1/2	85 1/2	85 1/2	85 1/2
Width - Crated (in.)	31 5/8	42	64	64
Depth - Crated (in.)	42	42	42	42

Ship Weight for -SA and -SS models is on average 5% higher than Standard models. Consult factory for shipping weight of these models.



Equipped with (1) 90° hospital grade NEMA-5-15P plug (varies by country)

LOCATION OF 1/2" DIAMETER PROBE ACCESS PORT:

(1) Ceiling, front top left corner

Consult factory for exact locations

Due to our continued efforts in developing innovative products, specifications subject to change without notice.

© Copyright 2021. Continental Refrigerator.
A Division of National Refrigeration & Air Conditioning Products, Inc.



SOLID DOOR LABORATORY/PHARMACY FREEZERS

Project Name:

Model Specified:

Location:

Item No:

Quantity:

Continental

SCIENTIFIC

539 Dunksferry Road
Bensalem, PA 19020
www.continentalscientific.com

Toll-Free: 800-523-7138
Phone: 215-244-1400
Fax: 215-244-9579

S1FN



**COMPLIES WITH CDC & VFC (VACCINES FOR CHILDREN)
RECOMMENDED GUIDELINES FOR VACCINE STORAGE**

S2FN



**COMPLIES WITH CDC & VFC (VACCINES FOR CHILDREN)
RECOMMENDED GUIDELINES FOR VACCINE STORAGE**

S3FN



Standard Model Features

REFRIGERATION SYSTEM

Stainless steel front, aluminum end panels & interior
Self contained, performance-rated refrigeration system
Natural, environmentally-safe, high-efficiency R-290 refrigerant
Automatic, electric condensate evaporator
Automatic electric defrost

CABINET ARCHITECTURE

3" Non-CFC polyurethane foamed-in-place insulation
Smooth, polished workflow chrome door handles
Heavy-duty epoxy-coated steel shelves
Cylinder lock in door
Magnetic snap-in Santoprene™ door gaskets
(2) 1/2" diameter access ports
Attached 10 ft. cord & 90° hospital grade NEMA-5-15P plug
Adjustable temperature control, range -22°C to -12°C, factory pre-set at -20°C
5" Casters

MODEL FEATURES

LED interior lighting
Electronic controller w/ centigrade temperature digital display

Options and Accessories




(upcharges and lead times may apply)

Adjustable legs	220/50/1 Voltage
Additional shelves	208-230/60/1 Voltage
Pass thru doors (-PT models)	7 Day temperature chart recorder
Rehinging of doors	Remote temperature logger
Half doors (-HD models)	Audible/visual temperature alarm w/ battery back-up & dry contact relay
Stainless steel exterior, aluminum interior (-SA models)	Export crating
Stainless steel exterior and interior (-SS models)	NIST thermometer (consult factory)

APPROVAL:

SOLID DOOR LABORATORY/PHARMACY FREEZERS

Line Drawings

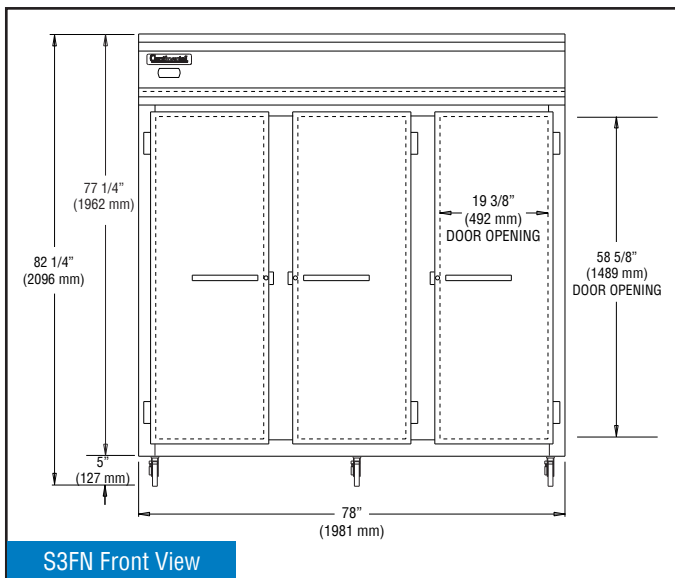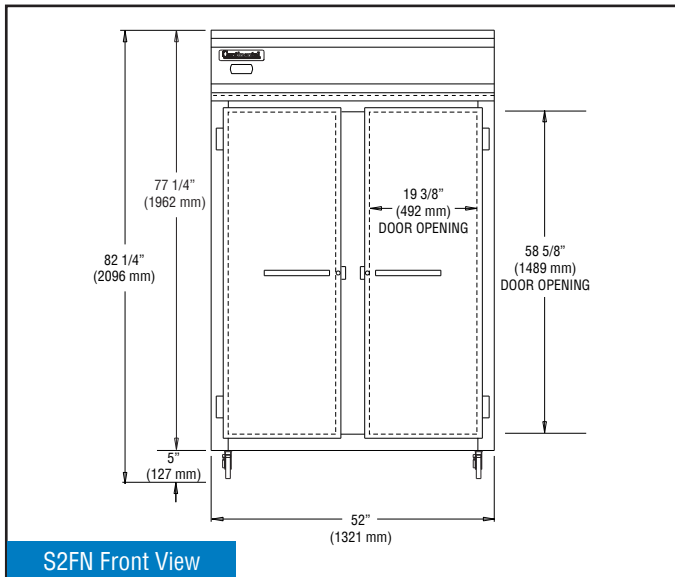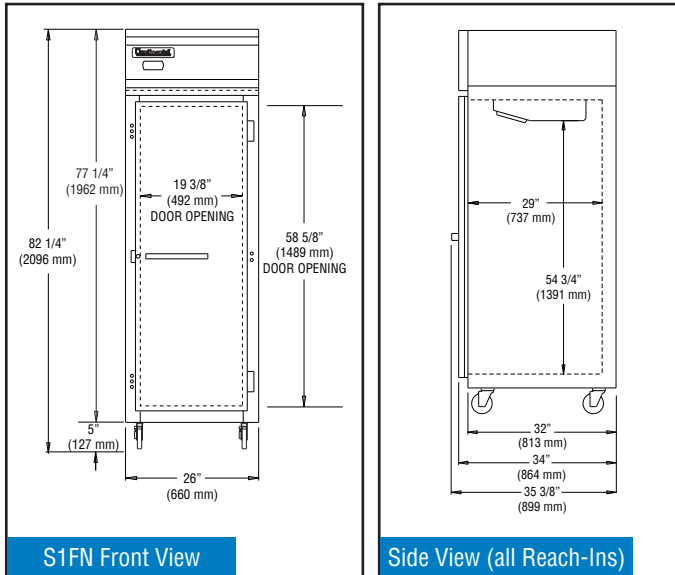

Continental

SCIENTIFIC

539 Dunksferry Road
Bensalem, PA 19020
www.continentalscientific.com

Toll-Free: 800-523-7138
Phone: 215-244-1400
Fax: 215-244-9579

Model Specifications

DIMENSIONAL DATA	S1FN	S2FN	S3FN
Net Capacity (cu. ft.)	20	48	70
Width, Overall (in.)	26	52	78
Depth, Overall (in.) (incl. handles & bumpers)	32	32	32
Height, Overall (in.)	82 1/4	82 1/4	82 1/4
No. of Doors	1	2	3
No. of Shelves	4	8	12
REFRIGERATION DATA			
Condensing Unit (H.P.)	1/3	1/2	1
ELECTRICAL DATA			
Voltage	115/60/1	115/60/1	115/208-230/60/1
Feed Wires (incl. ground)	3	3	4
Total Amps	6.3	9.8	11.9
10 ft. Cord/Plug [attached]	Yes	Yes	No
SHIPPING DATA			
Weight (lbs.)	325	555	790
Height - Crated (in.)	85 1/2	85 1/2	85 1/2
Width - Crated (in.)	31 5/8	64	90
Depth - Crated (in.)	42	42	42

Ship Weight for -SA and -SS models is on average 5% higher than Standard models. Consult factory for shipping weight of these models.



Equipped with (1) 90° hospital grade NEMA-5-15P plug (varies by country) (Excludes S3FN models)

LOCATION OF 1/2" DIAMETER PROBE ACCESS PORTS:

- (1) Ceiling, front top left corner
 - (1) Rear wall, top center
- Consult factory for exact locations

Due to our continued efforts in developing innovative products, specifications subject to change without notice.

© Copyright 2021. Continental Refrigerator.
A Division of National Refrigeration & Air Conditioning Products, Inc.



EXTRA WIDE SOLID DOOR LABORATORY/PHARMACY FREEZERS

Project Name:

Model Specified:

Location:

Item No:

Quantity:

Continental

SCIENTIFIC

539 Dunksferry Road
Bensalem, PA 19020
www.continentalscientific.com

Toll-Free: 800-523-7138
Phone: 215-244-1400
Fax: 215-244-9579

S1FXN



Standard Model Features

REFRIGERATION SYSTEM

- Stainless steel front, aluminum end panels & interior
- Self contained, performance-rated refrigeration system
- Natural, environmentally-safe, high-efficiency R-290 refrigerant
- Automatic, electric condensate evaporator
- Automatic electric defrost

CABINET ARCHITECTURE

- 3" Non-CFC polyurethane foamed-in-place insulation
- Smooth, polished workflow chrome door handles
- Heavy-duty epoxy-coated steel shelves
- Cylinder lock in door
- Magnetic snap-in Santoprene™ door gasket
- (2) 1/2" diameter probe access ports
- Attached 10 ft. cord & 90° hospital grade NEMA-5-15P plug
- Adjustable temperature control, range -22°C to -12°C, factory pre-set at -20°C
- 5" Casters

MODEL FEATURES

- LED interior lighting
- Electronic controller w/ centigrade temperature digital display

Options and Accessories


(upcharges and lead times may apply)

Adjustable legs	220/50/1 Voltage
Additional shelves	208-230/60/1 Voltage
Pass thru doors (-PT models)	7 Day temperature chart recorder
Rehinging of doors	Remote temperature logger
Half doors (-HD models)	Audible/visual temperature alarm w/ battery back-up & dry contact relay
Stainless steel exterior, aluminum interior (-SA models)	Export crating
Stainless steel exterior and interior (-SS models)	NIST thermometer (consult factory)


APPROVAL:

EXTRA WIDE SOLID DOOR LABORATORY/PHARMACY FREEZERS

Line Drawings

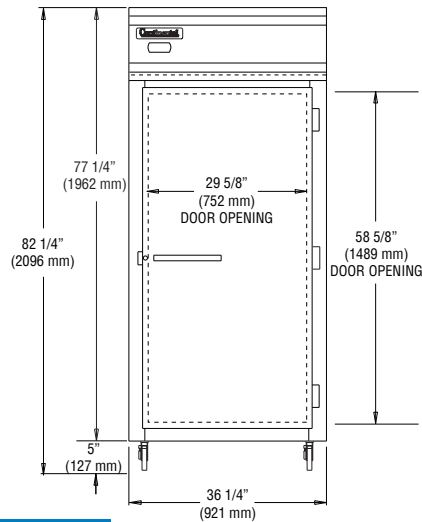

S1FXN Front View

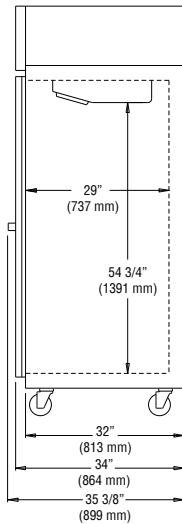

S1FXN Side View

Continental

SCIENTIFIC

539 Dunksferry Road
Bensalem, PA 19020

www.continentalscientific.com

Toll-Free: 800-523-7138
Phone: 215-244-1400
Fax: 215-244-9579

Model Specifications

DIMENSIONAL DATA

	S1FXN
Net Capacity (cu. ft.)	30
Width, Overall (in.)	36 1/4
Depth, Overall (in.) (incl. handles & bumpers)	35 3/8
Height, Overall (in.)	82 1/4
No. of Doors	1
No. of Shelves	4

REFRIGERATION DATA

Condensing Unit (H.P.)	1/2
Voltage	115/60/1
Feed Wires (incl. ground)	3
Total Amps	8.6
10 ft. Cord/Plug [attached]	Yes

SHIPPING DATA

Weight (lbs.)	445
Height - Crated (in.)	85 1/2
Width - Crated (in.)	42
Depth - Crated (in.)	42

Ship Weight for -SA and -SS models is on average 5% higher than Standard models. Consult factory for shipping weight of these models.



Equipped with (1) 90° hospital grade NEMA-5-15P plug (varies by country)

LOCATION OF 1/2" DIAMETER PROBE ACCESS PORTS:

- (1) Ceiling, front top left corner
- (1) Rear wall, top center

Consult factory for exact locations

Due to our continued efforts in developing innovative products, specifications subject to change without notice.

© Copyright 2021. Continental Refrigerator.
A Division of National Refrigeration & Air Conditioning Products, Inc.



HALF DOOR LABORATORY/PHARMACY COLDWALL FREEZERS

Project Name:

Model Specified:

Location:

Item No:

Quantity:

Continental

SCIENTIFIC

539 Dunksferry Road
Bensalem, PA 19020
www.continentalscientific.com

Toll-Free: 800-523-7138
Phone: 215-244-1400
Fax: 215-244-9579

S1F-HD-CW



Standard Model Features

REFRIGERATION SYSTEM

- Stainless steel front, aluminum end panels & interior
- Self contained, performance-rated refrigeration system
- Environmentally-safe R-404A refrigerant*
- Manual defrost

CABINET ARCHITECTURE

- 3" Non-CFC polyurethane foamed-in-place insulation
- Smooth, polished workflow chrome door handles
- Heavy-duty epoxy-coated steel shelves
- Cylinder lock in door
- Magnetic snap-in Santoprene™ door gaskets
- (2) 1/2" diameter access ports
- Attached 10 ft. cord & 90° hospital grade NEMA-5-15P plug
- Adjustable temperature control, range -22°C to -12°C, factory pre-set at -20°C
- 5" Casters

MODEL FEATURES

- LED interior lighting
- Digital thermometer

* - Consult factory for low GWP (Global Warming Potential) refrigerant option 448A

S1FX-HD-CW



Options and Accessories

(upcharges and lead times may apply)

Adjustable legs	220/50/1 Voltage
Additional shelves	208-230/60/1 Voltage
Rehinging of doors	7 Day temperature chart recorder
Stainless steel exterior, aluminum interior (-SA models)	Remote temperature logger
Stainless steel exterior and interior (-SS models)	Audible/visual temperature alarm w/ battery back-up & dry contact relay
Export crating	NIST thermometer (consult factory)




S2F-HD-CW



APPROVAL:

HALF DOOR LABORATORY/PHARMACY COLDWALL FREEZERS

Line Drawings

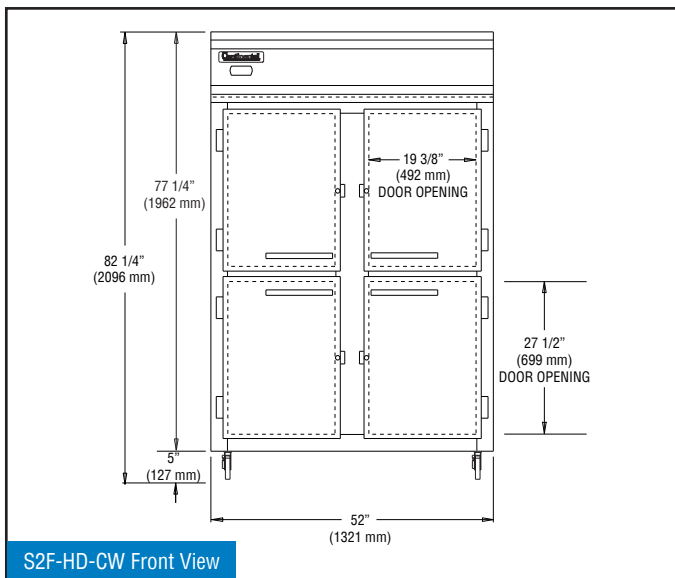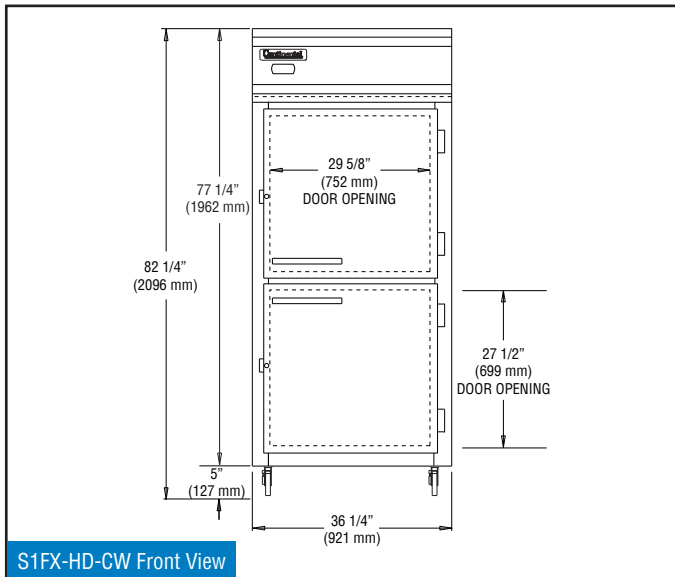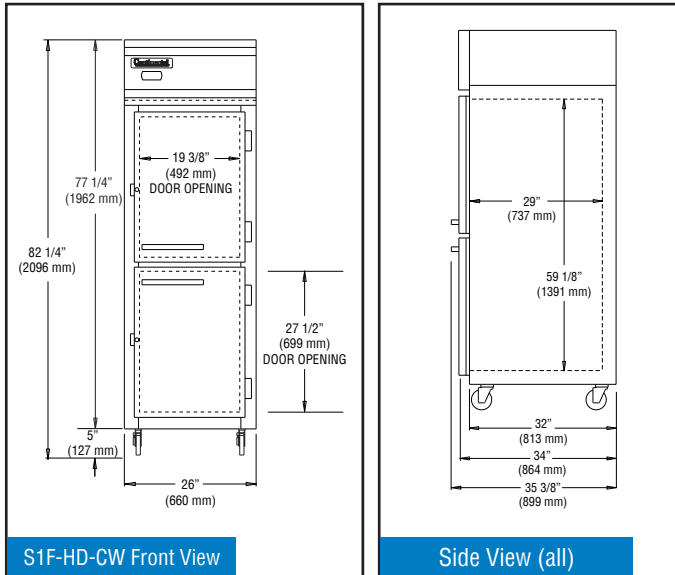

Continental

SCIENTIFIC

539 Dunksferry Road
 Bensalem, PA 19020
www.continentalscientific.com

Toll-Free: 800-523-7138
 Phone: 215-244-1400
 Fax: 215-244-9579

Model Specifications

DIMENSIONAL DATA	S1F-HD-CW	S1FX-HD-CW	S2F-HD-CW
Net Capacity (cu. ft.)	20	30	48
Width, Overall (in.)	26	36 1/4	52
Depth, Overall (in.) (incl. handles & bumpers)	35 3/8	35 3/8	35 3/8
Height, Overall (in.)	82 1/4	82 1/4	82 1/4
No. of Doors (Half)	2	2	4
No. of Shelves	4	4	8
REFRIGERATION DATA			
Condensing Unit (H.P.)	1/3	1/2	1/2
ELECTRICAL DATA			
Voltage	115/60/1	115/60/1	115/60/1
Feed Wires (incl. ground)	3	3	3
Total Amps	5.1	8.3	8.3
10 ft. Cord/Plug [attached]	Yes	Yes	Yes
SHIPPING DATA			
Weight (lbs.)	325	445	555
Height - Crated (in.)	85 1/2	85 1/2	85 1/2
Width - Crated (in.)	31 5/8	42	64
Depth - Crated (in.)	42	42	42

Ship Weight for -SA and -SS models is on average 5% higher than Standard models. Consult factory for shipping weight of these models.



Equipped with (1) 90° hospital grade NEMA-5-15P plug (varies by country)

LOCATION OF 1/2" DIAMETER PROBE ACCESS PORTS:

- (1) Ceiling, front top left corner
- (1) Rear wall, top center

Consult factory for exact locations

Due to our continued efforts in developing innovative products, specifications subject to change without notice.

© Copyright 2021. Continental Refrigerator.
 A Division of National Refrigeration & Air Conditioning Products, Inc.



GLASS DOOR LABORATORY/PHARMACY FREEZERS

Project Name:

Model Specified:

Location:

Item No:

Quantity:

Continental

SCIENTIFIC

539 Dunksferry Road
Bensalem, PA 19020
www.continentalscientific.com

Toll-Free: 800-523-7138
Phone: 215-244-1400
Fax: 215-244-9579

S1FNGD



S1FXNGD



S2FNGD



S3FNGD



Standard Model Features

REFRIGERATION SYSTEM

- Stainless steel front, aluminum end panels & interior
- Self contained, performance-rated refrigeration system
- Natural, environmentally-safe, high-efficiency R-290 refrigerant
- Automatic, electric condensate evaporator
- Automatic electric defrost

CABINET ARCHITECTURE

- 3" Non-CFC polyurethane foamed-in-place insulation
- Chrome-plated handles
- Heavy-duty epoxy-coated steel shelves
- Cylinder lock in each door
- Magnetic snap-in door gaskets
- (2) 1/2" diameter access ports
- Attached 10 ft. cord & 90° hospital grade NEMA-5-15P plug (For S1FNGD and S1FXNGD)
- Adjustable temperature control, range -22°C to -12°C, factory pre-set at -20°C
- 5" Casters

MODEL FEATURES

- LED interior lighting
- Electronic controller w/ centigrade temperature digital display

Options and Accessories






(upcharges and lead times may apply)

Adjustable legs	220/50/1 Voltage
Additional shelves	208-230/60/1 Voltage
Pass thru doors (-PT models)	7 Day temperature chart recorder
Rehinging of doors	Remote temperature logger
Half doors (-HD models)	Audible/visual temperature alarm w/ battery back-up & dry contact relay
Stainless steel exterior, aluminum interior (-SA models)	Export crating
Stainless steel exterior and interior (-SS models)	NIST thermometer (consult factory)

APPROVAL:

GLASS DOOR LABORATORY/PHARMACY FREEZERS

Line Drawings

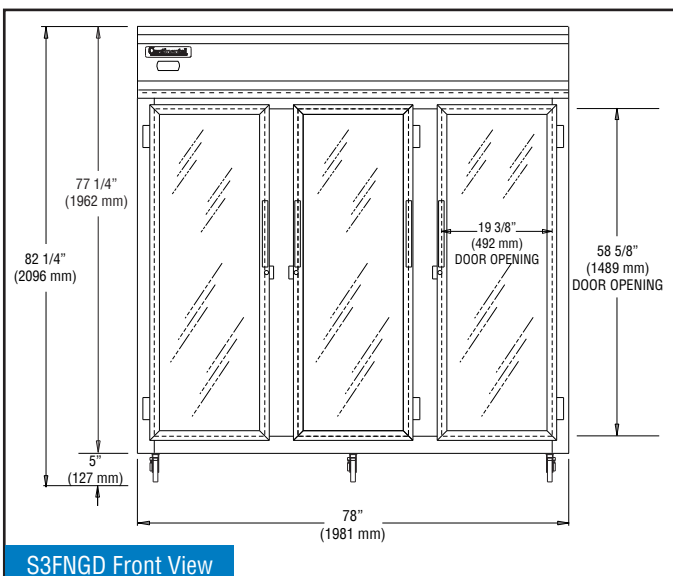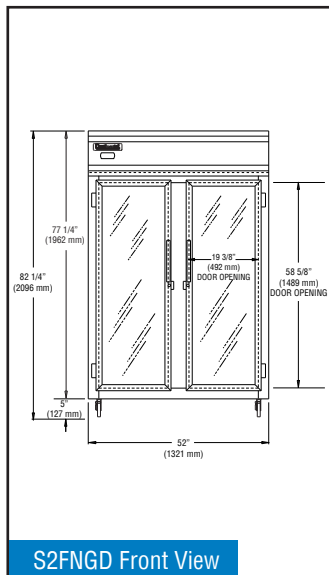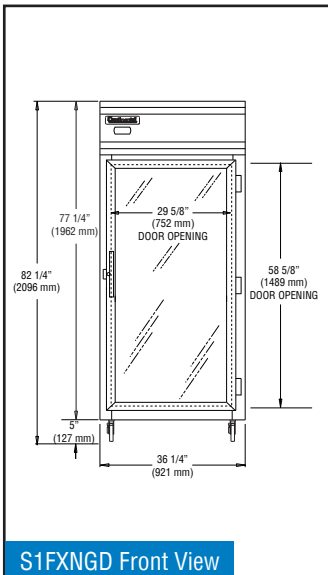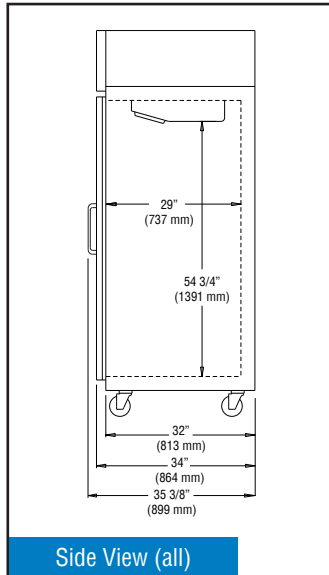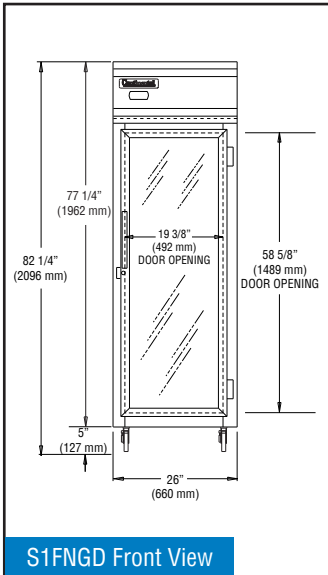

Continental

SCIENTIFIC

539 Dunksferry Road
Bensalem, PA 19020
www.continentalscientific.com

Toll-Free: 800-523-7138
Phone: 215-244-1400
Fax: 215-244-9579

Model Specifications

DIMENSIONAL DATA	S1FNGD	S1FXNGD	S2FNGD	S3FNGD
Net Capacity (cu. ft.)	20	30	48	70
Width, Overall (in.)	26	36 1/4	52	78
Depth, Overall (in.) (incl. handles & bumpers)	35 3/8	35 3/8	35 3/8	35 3/8
Height, Overall (in.)	82 1/4	82 1/4	85 3/4	85 3/4
No. of Doors	1	1	2	3
No. of Shelves	4	4	8	12
REFRIGERATION DATA				
Condensing Unit (H.P.)	1/2	1/2	1	1
ELECTRICAL DATA				
Voltage	115/60/1	115/60/1	115/208-230/60/1	115/208-230/60/1
Feed Wires (incl. ground)	3	3	4	4
Total Amps	8.2	9.4	12.4	14.7
10 ft. Cord/Plug [attached]	Yes	Yes	No	No
SHIPPING DATA				
Weight (lbs.)	330	455	565	805
Height - Crated (in.)	85 1/2	85 1/2	85 1/2	85 1/2
Width - Crated (in.)	31 5/8	42	64	90
Depth - Crated (in.)	42	42	42	42

Ship Weight for -SA and -SS models is on average 5% higher than Standard models. Consult factory for shipping weight of these models.



Equipped with (1) 90° hospital grade NEMA-5-15P plug (varies by country) (Excludes S2FNGD and S3FNGD models)

LOCATION OF 1/2" DIAMETER PROBE ACCESS PORTS:

- (1) Ceiling, front top left corner
 - (1) Rear wall, top center
- Consult factory for exact locations

Due to our continued efforts in developing innovative products, specifications subject to change without notice.

© Copyright 2021. Continental Refrigerator.
A Division of National Refrigeration & Air Conditioning Products, Inc.



COMBO DOOR PASS-THRU LABORATORY/PHARMACY FREEZERS

Project Name:

Model Specified:

Location:

Item No:

Quantity:

Continental

SCIENTIFIC

539 Dunksferry Road
Bensalem, PA 19020
www.continentalscientific.com

Toll-Free: 800-523-7138
Phone: 215-244-1400
Fax: 215-244-9579

S1FXNGDPT



Standard Model Features

REFRIGERATION SYSTEM

- Stainless steel front, aluminum end panels & interior
- Self contained, performance-rated refrigeration system
- Natural, environmentally-safe, high-efficiency R-290 refrigerant (S1FXNGDPT)
- Environmentally-safe R-448a refrigerant (S2F-GD-PT)
- Automatic, hot gas condensate evaporator
- Automatic electric defrost

CABINET ARCHITECTURE

- 3" Non-CFC polyurethane foamed-in-place insulation
- Chrome-plated handles
- Heavy-duty epoxy-coated steel shelves
- Cylinder lock in each door
- Magnetic snap-in door gaskets
- (1) 1/2" diameter probe access ports
- Attached 10 ft. cord & 90° hospital grade NEMA-5-15P plug
- Adjustable temperature control, range -22°C to -12°C, factory pre-set at -20°C
- 5" Casters

MODEL FEATURES

- LED interior lighting
- Glass door on one side, solid door on the other side
- Electronic controller w/ centigrade temperature digital display

S2F-GD-PT



Options and Accessories


(upcharges and lead times may apply)

Adjustable legs	220/50/1 Voltage
Additional shelves	208-230/60/1 Voltage
Rehinging of doors	7 Day temperature chart recorder
Half doors (-HD models)	Remote temperature logger
Stainless steel exterior, aluminum interior (-SA models)	Audible/visual temperature alarm w/ battery back-up & dry contact relay
Stainless steel exterior and interior (-SS models)	Export crating
NIST thermometer (consult factory)	


APPROVAL:

COMBO DOOR PASS-THRU LABORATORY/PHARMACY FREEZERS


Line Drawings

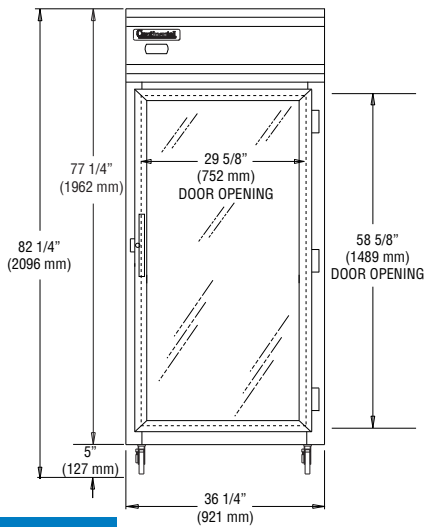

S1FXNGDPT Front View

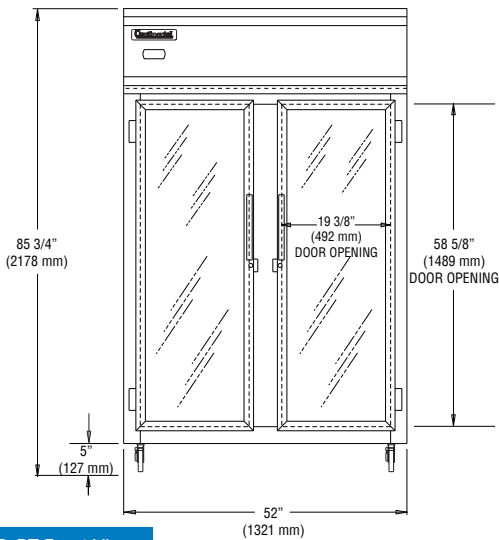

S2F-GD-PT Front View

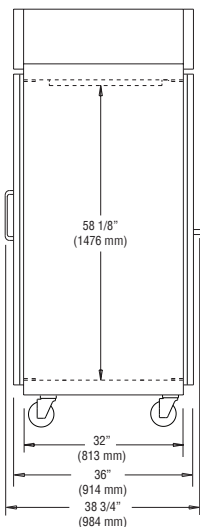

Side View (all)

Continental

SCIENTIFIC

539 Dunksferry Road
Bensalem, PA 19020

www.continentalscientific.com

Toll-Free: 800-523-7138
Phone: 215-244-1400
Fax: 215-244-9579

Model Specifications

DIMENSIONAL DATA

	S1FXNGDPT	S2F-GD-PT
Net Capacity (cu. ft.)	30	48
Width, Overall (in.)	36 1/4	52
Depth, Overall (in.) (incl. handles & bumpers)	38 3/4	38 3/4
Height, Overall (in.)	82 1/4	82 1/4
No. of Doors	2	4
No. of Shelves	4	8

REFRIGERATION DATA

Condensing Unit (H.P.)	1	3/4
------------------------	---	-----

ELECTRICAL DATA

Voltage	115/60/1	115/208-230/60/1
Feed Wires (incl. ground)	3	4
Total Amps	10.6	11.9
10 ft. Cord/Plug [attached]	Yes	No

SHIPPING DATA

Weight (lbs.)	450	665
Height - Crated (in.)	85 1/2	85 1/2
Width - Crated (in.)	42	64
Depth - Crated (in.)	42	42

Ship Weight for -SA and -SS models is on average 5% higher than Standard models. Consult factory for shipping weight of these models.



Equipped with (1) 90° hospital grade NEMA-5-15P plug (varies by country)
For S1FXN Only

LOCATION OF 1/2" DIAMETER PROBE ACCESS PORT:

(1) Ceiling, front top left corner

Consult factory for exact locations

Due to our continued efforts in developing innovative products, specifications subject to change without notice.

© Copyright 2021. Continental Refrigerator.
A Division of National Refrigeration & Air Conditioning Products, Inc.



SOLID DOOR DUAL TEMP LABORATORY/PHARMACY REFRIGERATORS/FREEZERS

Project Name:

Model Specified:

Location:

Item No:

Quantity:

Continental

SCIENTIFIC

539 Dunksferry Road
Bensalem, PA 19020
www.continentalscientific.com

Toll-Free: 800-523-7138
Phone: 215-244-1400
Fax: 215-244-9579

S1RFN



Standard Model Features

REFRIGERATION SYSTEM

- Stainless steel front, aluminum end panels & interior
- Self contained, performance-rated refrigeration system
- Natural, environmentally-safe, high-efficiency R-290 refrigerant
- Automatic, electric condensate evaporator
- Automatic electric defrost (freezer section)

CABINET ARCHITECTURE

- 3" Non-CFC polyurethane foamed-in-place insulation
- Smooth, polished workflow chrome door handles
- Heavy-duty epoxy-coated steel shelves
- Cylinder lock in door
- Magnetic snap-in Santoprene™ door gaskets
- (2) 1/2" diameter access ports
- (2) Attached 10 ft. cord & 90° hospital grade NEMA-5-15P plug
- Adjustable temperature control, Refrigerator range: +2°C to +8°C, factory pre-set at +4°C
Freezer range: -22°C to -12°C, factory pre-set at -20°C
- 5" Casters

MODEL FEATURES

- LED interior lighting
- Electronic controller w/ centigrade temperature digital display
- Half doors (-HD models)

Options and Accessories



(upcharges and lead times may apply)

Adjustable legs	220/50/1 Voltage
Additional shelves	208-230/60/1 Voltage
Rehinging of doors	7 Day temperature chart recorder
Stainless steel exterior, aluminum interior (-SA models)	Remote temperature logger
Stainless steel exterior and interior (-SS models)	Export crating
Audible/visual temperature alarm w/ battery back-up & dry contact relay	NIST thermometer (consult factory)

APPROVAL:

SOLID DOOR DUAL TEMP LABORATORY/PHARMACY REFRIGERATORS/FREEZERS

Line Drawings

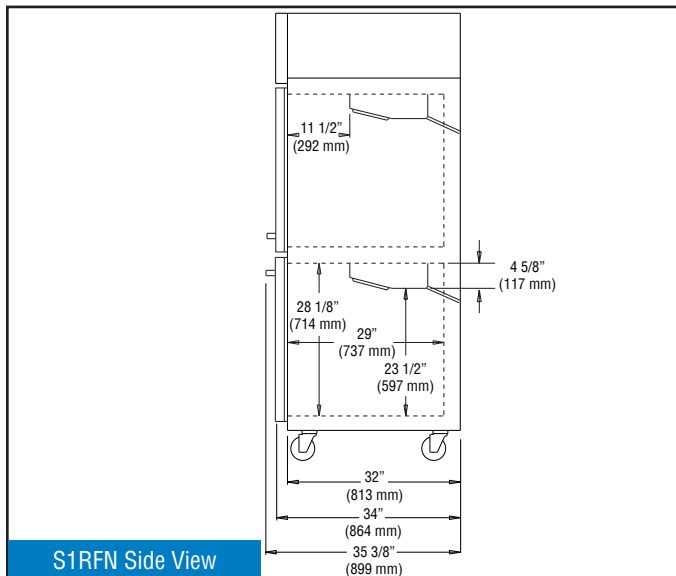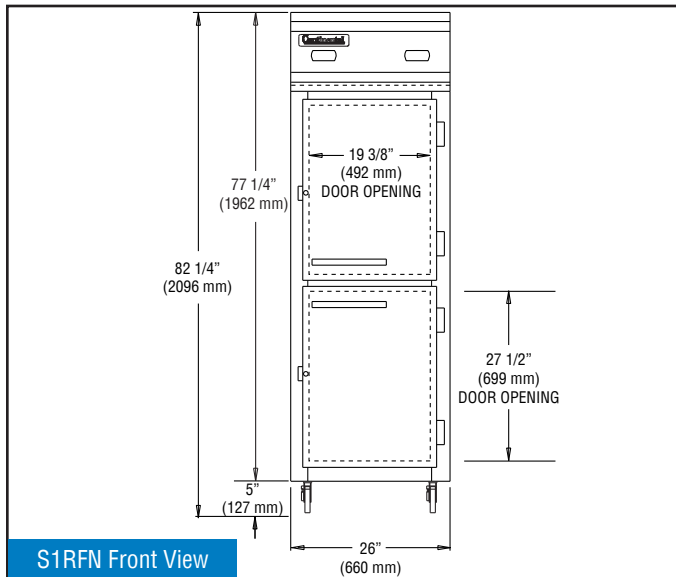

Continental

SCIENTIFIC

539 Dunksferry Road
Bensalem, PA 19020
www.continentalscientific.com

Toll-Free: 800-523-7138
Phone: 215-244-1400
Fax: 215-244-9579

Model Specifications

DIMENSIONAL DATA

	S1RFN
Net Capacity (cu. ft.)	10/10
Width, Overall (in.)	26
Depth, Overall (in.) (incl. handles & bumpers)	35 3/8
Height, Overall (in.)	82 1/4
No. of Doors	2
No. of Shelves	4

REFRIGERATION DATA

Condensing Unit (H.P.)	1/5, 1/3
------------------------	----------

ELECTRICAL DATA

Voltage	115-60-1 (220/50/1)
Feed Wires (incl. ground)	3, 3
Total Amps	2.5, 5.7
Defrost Amps	3.9
10 ft. Cord/Plug [attached]	(2) Yes (No)

SHIPPING DATA

Weight (lbs.)	420
Height - Crated (in.)	85 1/2
Width - Crated (in.)	64
Depth - Crated (in.)	42

Ship Weight for -SA and -SS models is on average 5% higher than Standard models. Consult factory for shipping weight of these models.



Equipped with (1) 90° hospital grade NEMA-5-15P plug (varies by country)

LOCATION OF 1/2" DIAMETER PROBE ACCESS PORTS:

Consult factory for exact locations

Due to our continued efforts in developing innovative products, specifications subject to change without notice.

© Copyright 2021. Continental Refrigerator.
A Division of National Refrigeration & Air Conditioning Products, Inc.



SOLID DOOR DUAL TEMP LABORATORY/PHARMACY REFRIGERATORS/FREEZERS

Project Name:

Model Specified:

Location:

Item No:

Quantity:

Continental

SCIENTIFIC

539 Dunksferry Road
Bensalem, PA 19020
www.continentalscientific.com

Toll-Free: 800-523-7138
Phone: 215-244-1400
Fax: 215-244-9579

S2RFN



Standard Model Features

REFRIGERATION SYSTEM

- Stainless steel front, aluminum end panels & interior
- Self contained, performance-rated refrigeration system
- Natural, environmentally-safe, high-efficiency R-290 refrigerant
- Automatic, electric condensate evaporator
- Automatic electric defrost (freezer section)

CABINET ARCHITECTURE

- 3" Non-CFC polyurethane foamed-in-place insulation
- Smooth, polished workflow chrome door handles
- Heavy-duty epoxy-coated steel shelves
- Cylinder lock in door
- Magnetic snap-in Santoprene™ door gaskets
- (4) 1/2" diameter access ports
- (2) Attached 10 ft. cord & 90° hospital grade NEMA-5-15P plug
- Adjustable temperature control,
Refrigerator range: +2°C to +8°C, factory pre-set at +4°C
Freezer range: -22°C to -12°C, factory pre-set at -20°C
- 5" Casters

MODEL FEATURES

- LED interior lighting
- Electronic controller w/ centigrade temperature digital display

S3RRFN



Options and Accessories

(upcharges and lead times may apply)

Adjustable legs	220/50/1 Voltage
Additional shelves	208-230/60/1 Voltage
Pass thru doors (-PT models)	7 Day temperature chart recorder
Rehinging of doors	Remote temperature logger
Half doors (-HD models)	Audible/visual temperature alarm w/ battery back-up & dry contact relay
Stainless steel exterior, aluminum interior (-SA models)	Export crating
Stainless steel exterior and interior (-SS models)	NIST thermometer (consult factory)




S3RFFN



APPROVAL:

SOLID DOOR DUAL TEMP LABORATORY/PHARMACY REFRIGERATORS/FREEZERS

Line Drawings

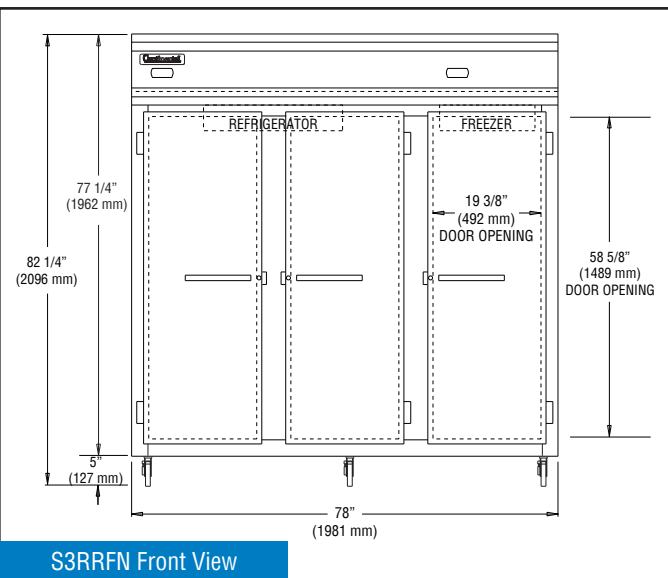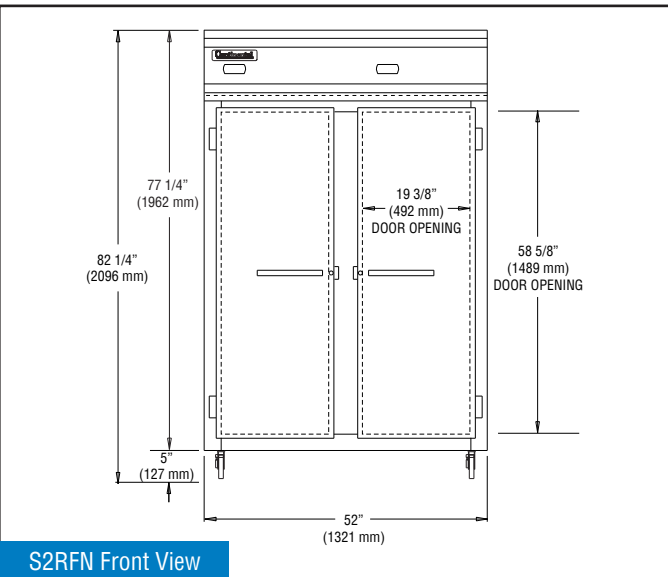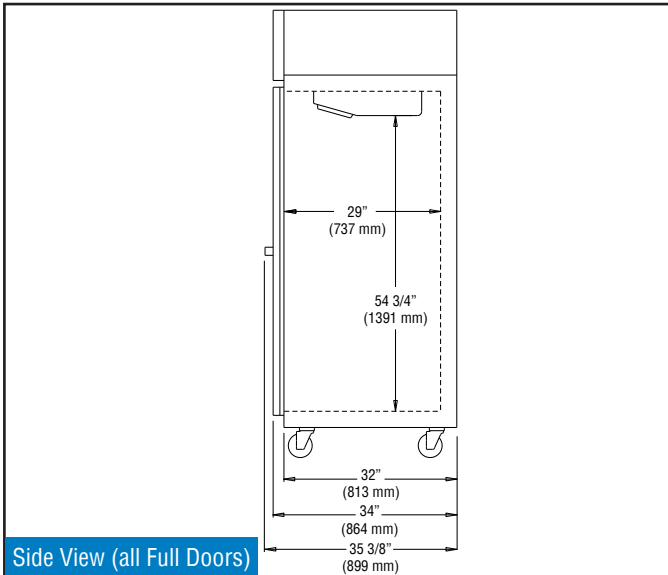

Continental

SCIENTIFIC

539 Dunksferry Road
Bensalem, PA 19020
www.continentalscientific.com

Toll-Free: 800-523-7138
Phone: 215-244-1400
Fax: 215-244-9579

Model Specifications

DIMENSIONAL DATA

	S2RFN	S3RRFN	S3RFFN
Net Capacity (cu. ft.)	20/20	48/20	20/48
Width, Overall (in.)	52	78	78
Depth, Overall (in.) (incl. handles & bumpers)	35 3/8	35 3/8	35 3/8
Height, Overall (in.)	82 1/4	82 1/4	82 1/4
No. of Doors	2	3	3
No. of Shelves	8	12	12

REFRIGERATION DATA

Condensing Unit (H.P.)	1/4+, 1/2	1/3+, 1/2	1/4, 1/2
------------------------	-----------	-----------	----------

ELECTRICAL DATA

Voltage	115-60-1	115-60-1	115-60-1
Feed Wires (incl. ground)	3, 3	3, 3	3, 3
Total Amps	5.2, 7.6	6.9, 7.6	5.5, 9.8
Defrost Amps	4.4	4.4	
10 ft. Cord/Plug [attached]	Yes (2)	Yes (2)	Yes (2)

SHIPPING DATA

Weight (lbs.)	580	835	835
Height - Crated (in.)	85 1/2	85 1/2	85 1/2
Width - Crated (in.)	64	90	90
Depth - Crated (in.)	42	42	42

Ship Weight for -SA and -SS models is on average 5% higher than Standard models. Consult factory for shipping weight of these models.



Equipped with (1) 90° hospital grade NEMA-5-15P plug (varies by country)

LOCATION OF 1/2" DIAMETER PROBE ACCESS PORTS:

Consult factory for exact locations

Due to our continued efforts in developing innovative products, specifications subject to change without notice.

© Copyright 2021. Continental Refrigerator.
A Division of National Refrigeration & Air Conditioning Products, Inc.



WARRANTY TERMS & CONDITIONS

UNITED STATES OF AMERICA & CANADA

ONE (1) YEAR PARTS AND LABOR WARRANTY

Continental Scientific warrants to the original purchaser of every new Continental Refrigerator self contained unit, including all parts thereof, that such equipment is free from defects in material and workmanship, under normal use, proper maintenance and service as indicated by Continental Scientific Installation and Operations Manual, for a period of one (1) year from the date of installation, or fifteen (15) months from the date of shipment from the manufacturer, whichever comes first. Normal wear type parts, such as light bulbs/lamps and gaskets are not covered by this warranty. **Adjustments including cabinet leveling, hinge adjustments, caster or leg adjustments, and adjustments to controls are not covered under this warranty. Water damage to the cabinet or electrical devices including moisture from other appliances or improper cleaning, is not covered under this warranty. Equipment failure deemed to be the result of modifications to the unit will not be covered under this warranty.** For the purpose of this warranty, the original purchaser shall be deemed to mean the individual or company for whom the product was originally installed.

Continental Scientific's obligation under this warranty shall be limited to repairing or replacing, including labor, any part of such product which proves thus defective. Continental Scientific reserves the right to examine any product claimed to be defective. The labor warranty shall be for self-contained units only and for standard straight time, which is defined as normal service rate time, for service performed during normal working hours. Any service requested outside of a servicer's normal working hours will be covered under this warranty for the normal rate and any additional overtime rate will be the responsibility of the equipment purchaser. **Please contact the factory to obtain proper authorization for service. You may call directly or request service at <http://www.continentalscientific.com/product-question/>.**

Any part determined to be defective in the product should be returned to the company within thirty (30) days under the terms of this warranty and must be accompanied by the cabinet model, serial number, and identified with a return material authorization number, issued by the manufacturer.

Special installation/applications, including remote locations, are limited in coverage by this warranty. Any installation that requires extra work, and/or travel, to gain access to the unit for service is the sole responsibility of the equipment purchaser.

Improper operation resulting from factors, including but not limited to, improper installation, improper or negligent cleaning and maintenance, out of tolerance voltage conditions, inadequate wiring, and accidental damage are not manufacturing defects and are strictly the responsibility of the purchaser.

Condenser coils must be cleaned at regular intervals. Failure to do so can cause compressor malfunction and will void warranty. Continental Refrigerator recommends a minimum monthly cleaning, as stated in the installation and operation manual.

ADDITIONAL (4) YEARS COMPRESSOR PART WARRANTY

In addition to the warranty set forth above, Continental Scientific warrants the hermetically/semi-hermetically sealed compressor (part only) for an additional four (4) years beyond the first one (1) year warranty period; not to exceed sixty-three (63) months from the date of shipment from Continental Scientific, provided upon receipt of the compressor, manufacturer examination shows the sealed compressor to be defective. This extended warranty does not cover freight for the replacement compressor or freight for return of the failed compressor. Also, this extended compressor-part only warranty does not apply to any electrical controls, condenser, evaporator, fan motors, overload switch, starting relay, capacitors, temperature control, filter/drier, accumulator, refrigeration tubing, wiring harness, labor charges, or supplies which are covered by the standard warranty above.

THE FOREGOING WARRANTIES ARE EXPRESSLY GIVEN IN LIEU OF ALL OTHER WARRANTIES, EXPRESS, IMPLIED, OR STATUTORY, INCLUDING THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE, WHICH ARE HEREBY DISCLAIMED, ALONG WITH ALL OTHER OBLIGATIONS OR LIABILITIES ON OUR PART. AND WE NEITHER ASSUME, NOR AUTHORIZE ANY OTHER PERSON TO ASSUME FOR US, ANY OBLIGATION OR LIABILITY IN CONNECTION WITH THE SALE OF SAID REFRIGERATION UNITS OR ANY PARTS THEREOF.

This warranty shall not be assignable and shall be honored only in so far as the original purchaser.

This warranty does not apply outside the limits of the Latin America and the Caribbean Regions, nor does it apply to any part that has been subject to misuse, neglect, alteration, accident, or to any damage caused by transportation, flood, fire, acts of terrorism, or acts of God.

IN NO EVENT SHALL CONTINENTAL REFRIGERATOR BE LIABLE FOR CONSEQUENTIAL, SPECIAL OR PUNITIVE DAMAGES. THE REMEDIES OF PURCHASER SET FORTH HEREIN ARE EXCLUSIVE AND THE TOTAL LIABILITY OF CONTINENTAL SCIENTIFIC, WHETHER BASED ON CONTRACT, WARRANTY, NEGLIGENCE, INDEMNIFICATION, STRICT LIABILITY, TORT, OR OTHERWISE, SHALL NOT EXCEED THE PURCHASE PRICE OF THE COMPONENT UPON WHICH LIABILITY IS BASED. CONTINENTAL SCIENTIFIC SHALL HAVE NO OBLIGATION OR LIABILITY FOR CONSEQUENTIAL OR SPECIAL DAMAGES, INCLUDING BUT NOT LIMITED TO INDIRECT, PUNITIVE DAMAGES, LOSS OF USE, LOSS OF PRODUCT, DOWNTIME OR LOST PROFITS, ARISING OUT OR, RELATED TO OR CONNECTED IN ANY WAY WITH THE PRODUCT OR ITS USE.

See our Service Guideline at <http://www.continentalscientific.com/service-parts/> for additional information regarding service and warranty coverage.



Continental *SCIENTIFIC*

A Division of National Refrigeration & Air Conditioning Products

Continental Refrigerator	Local: (215) 244-1400
539 Dunksferry Road	Toll Free: (800) 523-7138
Bensalem, PA 19020	Fax: (215) 244-9579

www.continentalscientific.com



MADE IN THE U.S.A

Due to our continued efforts in developing innovative products,
specifications subject to change without notice.

Scientific Spec Sheet Catalog (10/4/21)